


闸阀

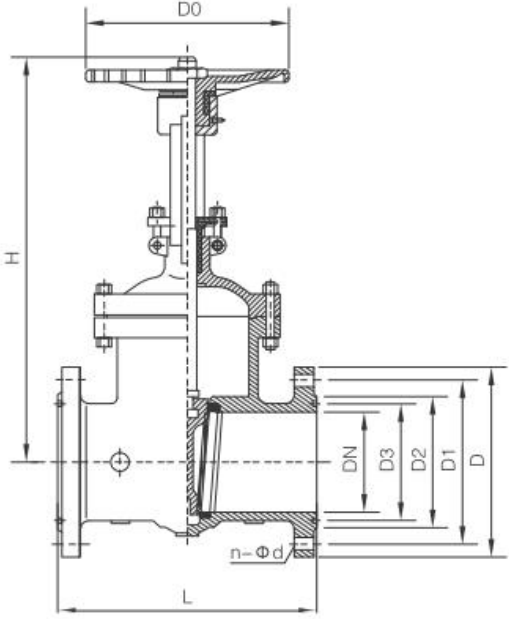

设计与应用标准

- 1、设计与制造标准:GB/T12234-2
- 2、连接法兰标准:JB/T79-2005
- 3、结构长度标准:GB/T12221-2005
- 4、检验与试验标准:JB/T9092-99

主要性能规范

型号	公称压力 (MPa)	测试压力 (MPa)			适用温度	适用介质
		壳体 (水)	密封 (水)	气密 (气)		
Z41H-16C Z41W-16P	1,6	2,4	1,76	0,6	≤200	硝酸类
Z41W-25P	2,5	3,8	2,8	0,6	≤200	醋酸类
Z41W-40P	4,0	6,0	4,4	0,6	≤200	硝酸类
Z41W-64P	6,4	9,6	7,0	0,6	≤200	醋酸类

主要零件材质

零件名称	Серия ZG1Cr18Ni9Ti 系列	ZG00Cr18Ni10 系列	ZGC r18Ni12M02Ti 系列	ZG00Cr17Ni14M02 系列	WCB 系列
阀体/ 阀盖	ZG1Cr18Ni9Ti	ZG00Cr18Ni10	ZGCr18Ni12M02Ti	ZG00Cr17Ni14M02	WCB
闸板	ZG1Cr18Ni9Ti	ZG00Cr18Ni10	ZGCr18Ni12M02Ti	ZG00Cr17Ni14M02	1Cr13
阀杆	1Cr18Ni9Ti	00Cr18Ni10	Cr18Ni12M02Ti	00Cr17Ni14M02	1Cr13
填料	PTFE 编织	PTFE 编织	PTFE 编织	PTFE 编织	石墨
垫片	304L + PTFE	304L + PTFE	316 + PTFE	316L + PTFE	石墨
压盖	ZG1Cr18Ni9Ti	ZG00Cr18Ni10	ZGCr18Ni12M02Ti	GZ00Cr17Ni14M02	WCB
填料	1Cr18Ni9Ti	00Cr18Ni10	Cr18Ni12M02Ti	00Cr17Ni14M02	1Cr13

零件 名称	Серия ZG1Cr18Ni9Ti 系列	ZG00Cr18Ni10 系列	ZGC r18Ni12M02Ti 系列	ZG00Cr17Ni14M02 系列	WCB 系 列
压环					
螺栓	1Cr17Ni2	1Cr17Ni2	1Cr17Ni2	1Cr17Ni2	35CrMOA
螺母	1Cr18Ni9Ti	1Cr18Ni9Ti	1Cr18Ni9Ti	1Cr18Ni9Ti	45

主要连接尺寸

公称压力 (MPa)	DN	L	D	D1	H	W	n-Φd
1,6	50	250	160	125	358	240	4-18
1,6	65	270	180	145	373	240	4-18
1,6	80	280	195	160	435	280	8-18
1,6	100	300	215	180	500	320	8-18
1,6	125	325	245	210	614	360	8-18
1,6	150	350	280	240	674	360	8-23
1,6	200	400	335	295	818	400	12-23
1,6	250	450	405	355	1225	450	12-25
1,6	300	500	460	410	1415	500	12-25
1,6	350	550	520	470	1620	500	16-25
1,6	400	600	580	525	1780	600	16-30
1,6	450	650	640	585	2050	720	20-30
1,6	500	700	705	650	2181	720	20-34
1,6	600	800	840	770	2599	720	20-41
2,5	50	250	160	125	358	240	4-18
2,5	65	270	180	145	373	240	4-18
2,5	80	280	195	160	435	280	8-18
2,5	100	300	230	190	500	320	8-23
2,5	125	325	270	220	614	360	8-25
2,5	150	350	300	250	674	360	8-25
2,5	200	400	360	310	818	400	12-25
2,5	250	450	425	370	1225	450	12-30
2,5	300	500	485	430	1415	500	12-30
2,5	350	550	540	490	1620	500	16-34
2,5	400	600	600	550	1780	600	16-34
2,5	450	650	660	600	2050	720	20-34
2,5	500	700	730	660	2181	720	20-41
2,5	600	800	840	770	2599	720	20-41
4,0	50	250	160	125	358	240	4-18
4,0	65	280	180	145	373	240	4-18
4,0	80	280	195	160	435	280	8-18
4,0	100	350	230	190	500	320	8-23
4,0	125	400	270	220	614	360	8-25
4,0	150	450	300	250	674	360	8-25
4,0	200	550	375	320	818	400	12-30
4,0	250	650	445	385	1225	450	12-34
4,0	300	750	510	450	1415	500	12-34

公称压力 (MPa)	DN	L	D	D1	H	W	n-Φd
4,0	350	850	570	510	1620	500	16-34
4,0	400	950	630	570	1780	600	16-41
6,4	50	250	175	135	359	240	4-23
6,4	65	280	200	160	373	240	8-23
6,4	80	310	210	170	435	320	8-23
6,4	100	350	250	200	500	360	8-25
6,4	125	400	295	240	614	440	8-30
6,4	150	450	340	280	674	400	8-34
6,4	200	550	405	340	818	400	12-34
6,4	250	650	470	400	970	560	12-41
6,4	300	750	530	460	1145	640	16-41
6,4	350	850	595	525	1280	800	16-41
6,4	400	950	670	585	1450	800	16-48
10	50	250	195	145	359	240	4-25
10	65	280	220	170	373	320	8-25
10	80	310	250	200	435	360	8-25
10	100	350	285	230	500	360	8-30
10	125	400	310	250	614	450	8-34
10	150	450	350	290	674	560	12-34
10	200	550	430	360	818	640	12-41
10	250	650	500	430	970	720	12-41
16	50	300	215	165	359	240	4-25
16	65	340	245	190	373	280	8-30
16	80	390	280	220	435	320	8-34
16	100	450	300	240	500	360	8-34
16	125	525	355	285	614	400	8-41
16	150	600	390	318	674	560	12-48